



MODELO	CTE	r.p.m.	C.V.	kW	l/h	bar
RD-IND J-10	230 II	1500	2	1,5	10000	2,5
	230/400 III	1500	2	1,5	10000	2,5
	230/400 III	1000	1	0,75	7500	2
	230/400 III	750	0,75	0,55	5500	1,5
RD-IND J-20	230 II	1500	2	1,5	20000	2,5
	230/400 III	1500	2	1,5	20000	2,5
	230/400 III	1000	1,5	1,1	20000	2
	230/400 III	750	1	0,75	20000	1,5

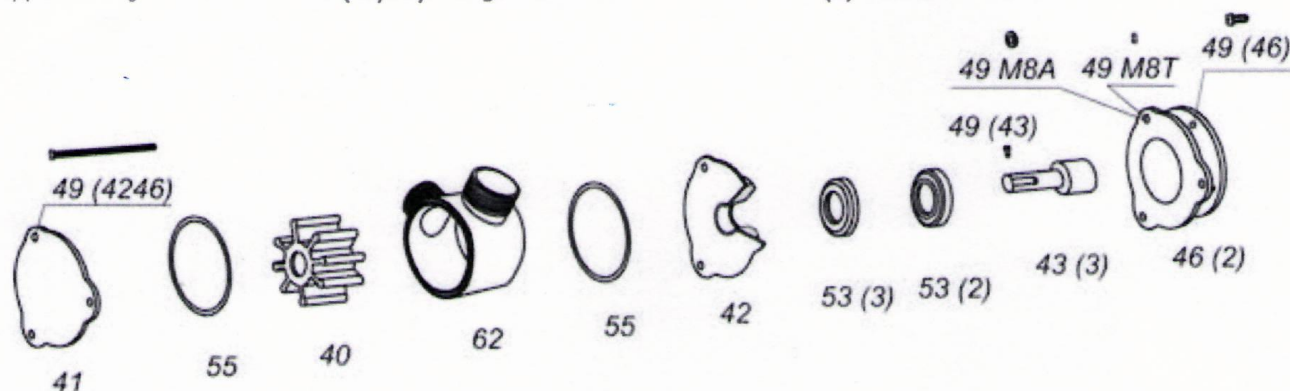

- 40** Turbina  
**41** Tapa delantera  
**42** Tapa trasera  
**43(3)** Eje suplementario  
**46(2)** Pletina

- 46(46)** Tornillo pletina  
**49(43)** Tornillo eje  
**49(42/46)** Tornillo brida  
**49M/8A** Arandela brida  
**49M/8T** Tuerca brida

- 53(2)** Sello mecánico  
**53(3)** Cerámica  
**55** Junta tórica  
**62** Cuerpo

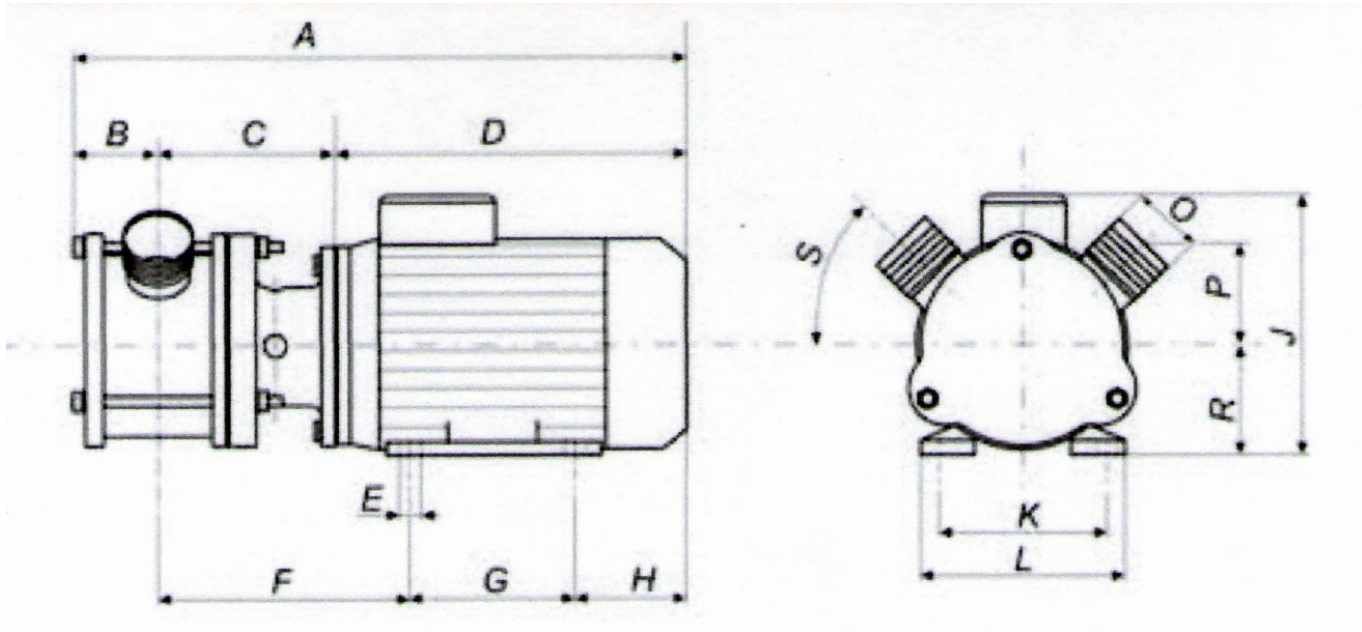

## DIMENSIONES

MODELO	A	B	C	D	E	F	G	H	J	K	L	O	P	R	S
RD-IND J10 II 1500 rpm	462	44	108	310	9	170	140	108	270	160	193	1 1/4"	51	90	45°
RD-IND J10 III 1500 rpm	373	44	108	220	9	140	100	90	204	125	154	1 1/4"	51	80	45°
RD-IND J10 III 1000 rpm	406	44	108	254	9	162	100	100	220	140	175	1 1/4"	51	90	45°
RD-IND J10 III 750 rpm	432	44	108	280	9	165	125	98	220	140	175	1 1/4"	51	90	45°
RD-IND J20 II 1500 rpm	497	62	125	310	11	187	140	108	270	160	193	2"	56	90	45°
RD-IND J20 III 1500 rpm	407	62	125	220	11	156	100	90	204	125	154	2"	56	80	45°
RD-IND J20 III 1000 rpm	465	62	125	278	11	178	125	100	220	140	185	2"	56	90	45°
RD-IND J20 III 750 rpm	465	62	125	278	11	178	125	100	220	140	185	2"	56	90	45°