



Performance curve ISO9906 Annex A 2900rpm

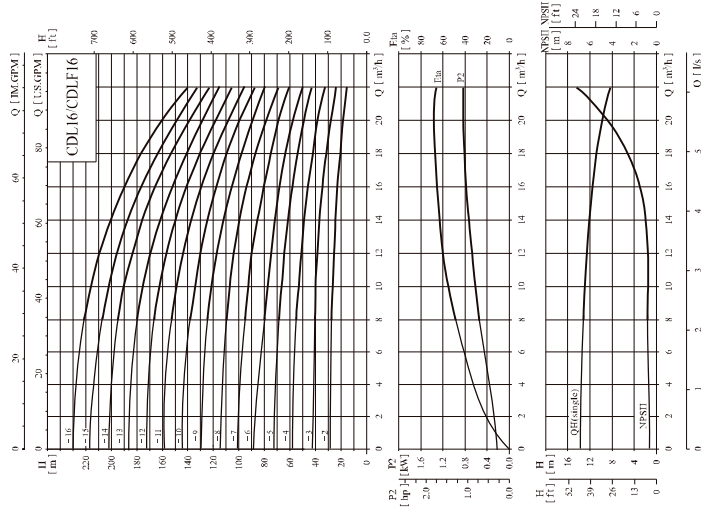

Installation sketch

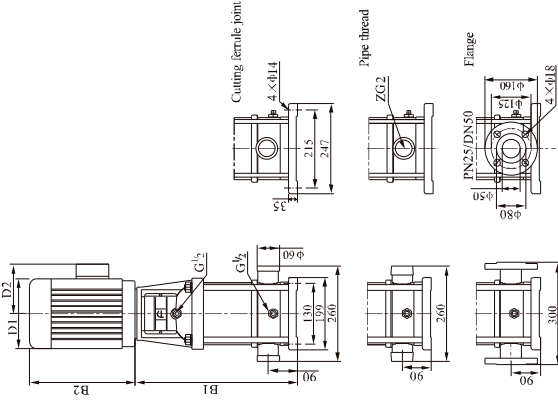

The overall dimensions of the single-phase motor and explosion-proof motor are a little different. Pls contact us for details.

Performance table

Model	Driving motor		Q (m³/h)	H (m)															
	(kW)	(hp)		8	10	12	14	16	18	20	22								
CDL16-2	2.2	3	27	26	25	24	22	21	19	16	14	12	10	8	6	4	2	0	
CDL16-3	3.0	4	41	40	38	37	34	32	29	25	22	19	16	14	12	10	8	6	4
CDL16-4	4.0	5.5	54	53	52	49	46	43	38	34	30	26	22	19	16	14	12	10	8
CDL16-5	5.5	7.5	68	67	65	62	58	54	48	43	38	34	30	26	22	19	16	14	12
CDL16-6	5.5	7.5	82	80	78	74	70	64	58	52	46	40	34	28	22	18	14	10	6
CDL16-7	7.5	10	96	95	91	87	82	76	68	61	54	46	38	30	22	16	10	6	2
CDL16-8	7.5	10	110	108	104	99	94	86	77	70	61	52	42	34	26	18	12	8	4
CDL16-10	11	15	138	136	131	125	118	109	97	87	76	64	52	40	30	22	14	10	6
CDL16-12	11	15	166	162	157	150	141	130	116	105	92	78	64	50	38	28	18	12	8
CDL16-14	15	20	194	190	184	175	166	152	136	122	106	90	74	58	44	32	22	14	10
CDL16-16	15	20	222	217	210	200	189	174	156	140	122	104	86	68	50	36	24	16	12

Size and weight

Model	Size(mm)				Weight (kg)
	B1	B2	B1+B2	D2	
CDL16-2	397	290	687	190	155
CDL16-3	452	345	797	197	165
CDL16-4	487	355	852	220	188
CDL16-5	582	380	952	260	208
CDL16-6	607	380	957	260	208
CDL16-7	652	380	1042	260	208
CDL16-8	697	380	1087	260	208
CDL16-10	875	500	1375	330	255
CDL16-12	965	500	1465	330	255
CDL16-14	1055	500	1555	330	255
CDL16-16	1145	550	1645	330	255