



BEG-70-EA  
BEG-70-EI



BEG-100-EA  
BEG-100-EI



BEG-150-EA  
BEG-150-EI



BEG-200-EA  
BEG-200-EI



BEG-70-I



BEG-100-I



BEG-150-I



BEG-200-I

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	puertas doors	separador shelves	capacidad capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W
BEG-70	+2°C +8°C	705	835	540	1	0	110	230V-50Hz	R600a	144	66
BEG-100	+2°C +8°C	1020	835	540	2	1	170	230V-50Hz	R600a	176	137
BEG-150	+2°C +8°C	1510	835	540	3	2	260	230V-50Hz	R600a	176	137
BEG-200	+2°C +8°C	2030	835	540	4	3	350	230V-50Hz	R600a	250	187

Características técnicas y constructivas sujetas a variación sin previo aviso.

**BEG-I:**

- Frente exterior y costados en acero AISI-304
- Respaldo exterior en acero galvanizado
- Interior en acero AISI-304

**BEG-EI:**

- Frente exterior y costados en acero plastificado color blanco
- Respaldo exterior en acero galvanizado
- Interior en acero AISI-304

**BEG-EA:**

- Frente exterior y costados en acero plastificado color blanco
- Respaldo exterior en acero galvanizado
- Interior en acero galvanizado

**CARACTERISTICAS COMUNES**

- Estantes interiores de alambre en acero plastificado.
- Unidad condensadora ventilada y extraíble.
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP.
- Evaporador estático.
- Control de temperatura.
- Interruptor general ON - OFF luminoso.
- Temperatura de trabajo a 32°C temperatura ambiente.

We reserve the right to change specifications without prior notice.

**BEG-I:**

- AISI-304 exterior front and sides
- Rear side galvanized panel
- AISI-304 interior

**BEG-EI:**


- Exterior front and sides white plastic coated steel
- Rear side galvanized panel
- AISI-304 interior

**BEG-EA:**

- Exterior front and sides white plastic coated steel
- Rear side galvanized panel
- Galvanized interior

**FEATURES IN COMMON**

- Plasticized steel wire internal dividers.
- Ventilated, pull-out condenser unit.
- 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP.
- Static evaporator.
- Temperature control.
- Luminous main switch ON - OFF.
- Working temperature, 32° ambient temperature.

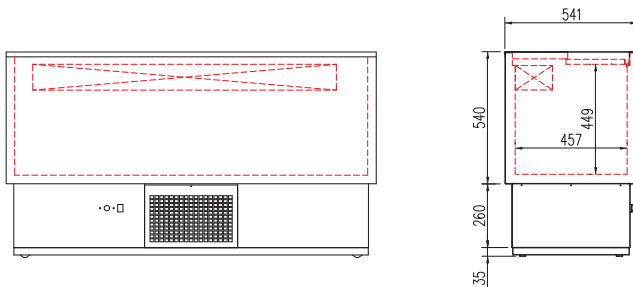

**OPCIONES**

230v 60Hz / 115v 60Hz

**OPTIONS**

230v 60Hz / 115v 60Hz

BEG-70-EA

all photos must be considered as a reference - fotografías no contractuales



BEG-100-EA



BEG-150-I



BEG-200-EA