

hydroo[®]

SXB

**5" Submersible
monoblock
electropumps**



SXB

5" Submersible monoblock electropumps

5" monoblock submersible electropumps made of AISI 304 stainless steel, designed to work in 5" or wider wells, artesian wells, tanks,...

Building features

Connection system by means of a removable connector.

Advantages:

- Perfect sealing
- Float can be inserted or not depending on the need.
- Sharp stock decrease (float switch stored separately).

AISI 304 stainless steel pump outlet.

Asynchronous motor cooled by pumped liquid.

304L stainless steel chamber.

Double mechanical seal with interposed oil chamber.

B-class condenser meeting long-lasting features (three times a standard condenser).

Techno-polymer impellers and diffusers:

- Higher performance.
- Higher resistance to sand.


304 stainless steel intake filter.

Uses

- To take water from tanks, collection tanks, watercourses, 6" wells.
- Pressurization systems.
- Irrigation.



Performance scope

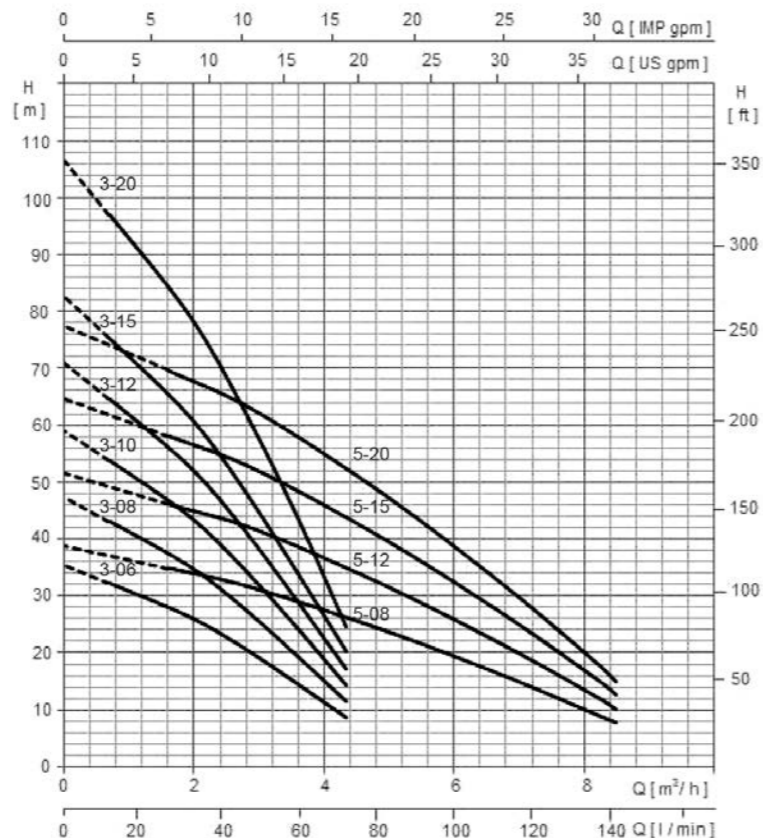

Performance table

Model		P ₂		Q (Flow Rate)								
Single Phase 230 V	Three Phase 230/400 V	(hp)	(KW)	[l/min]	0	20	40	60	80	100	120	140
				[m³/h]	0	1,2	2,4	3,6	4,8	6	7,2	8,4
H (Total Head) [m]												
SXB 3 - 06S	SXB 3 - 06T	0,6	0,45	35,5	30	23,5	14,4	5,3	—	—	—	—
SXB 3 - 08S	SXB 3 - 08T	0,8	0,6	47,3	40	31,7	19,5	6,9	—	—	—	—
SXB 3 - 10S	SXB 3 - 10T	1	0,75	59,1	50,1	39	24,2	8,2	—	—	—	—
SXB 3 - 12S	SXB 3 - 12T	1,2	0,9	70,9	59,7	47	29,4	9,4	—	—	—	—
SXB 3 - 15S	SXB 3 - 15T	1,5	1,1	82,7	70	55,7	34	10,9	—	—	—	—
SXB 3 - 20S	SXB 3 - 20T	2	1,5	106,3	90	69,8	43,4	13,3	—	—	—	—
SXB 5 - 08S	SXB 5 - 08T	0,8	0,6	38,7	35,9	32,9	29,2	24,6	19,1	13,9	8,2	—
SXB 5 - 12S	SXB 5 - 12T	1,2	0,9	51,8	47,8	43,9	38,8	32,8	26	18,9	11,2	—
SXB 5 - 15S	SXB 5 - 15T	1,5	1,1	64,5	59,8	54,8	49,3	40,9	32,2	23,3	13,8	—
SXB 5 - 20S	SXB 5 - 20T	2	1,5	77,4	71,8	65,7	58	49	38,9	28	16,3	—

Electrical data

Pump Type	P ₁ [kW] (Max Absorbed Power)	I [A] (Max Absorbed Current)	Capacitor [μF] / 450V
Single - Phase 230V			
SXB 3 - 06S	0,81	3,7	16
SXB 3 - 08S	1	4	25
SXB 3 - 10S	1,22	5,7	25
SXB 3 - 12S	1,4	6,5	35
SXB 3 - 15S	1,65	7,6	35
SXB 3 - 20S	2,15	9,8	40
SXB 5 - 08S	1,1	4,2	25
SXB 5 - 12S	1,32	6,4	35
SXB 5 - 15S	1,7	8	35
SXB 5 - 20S	1,95	9,15	40

Pump Type	P ₁ [kW] (Max Absorbed Power)	I [A] (Max Absorbed Current)	
		230 V	400 V
Three - Phase			
SXB 3 - 06T	0,82	2,4	1,4
SXB 3 - 08T	1,04	2,9	1,9
SXB 3 - 10T	1,3	3,8	2,2
SXB 3 - 12T	1,32	4,5	2,6
SXB 3 - 15T	1,51	4,8	2,9
SXB 3 - 20T	2,05	5,7	3,5
SXB 5 - 08T	1,12	4	2,1
SXB 5 - 12T	1,29	4,4	2,5
SXB 5 - 15T	1,64	4,9	3
SXB 5 - 20T	1,92	5,7	3,7

Technical specifications

Model		Dimension		Cable Type	Cable Length (m)
Single Phase 220 V	Three Phase 380 V	Length (mm)	Weight (kg)		
SXB 3 - 06S	SXB 3 - 06T	439	14	H07RN-F	10
SXB 3 - 08S	SXB 3 - 08T	495	15,5		
SXB 3 - 10S	SXB 3 - 10T	521	16,5		
SXB 3 - 12S	SXB 3 - 12T	590	19		
SXB 3 - 15S	SXB 3 - 15T	616	20		
SXB 3 - 20S	SXB 3 - 20T	698	23,5		
SXB 5 - 08S	SXB 5 - 08T	469	16		
SXB 5 - 12S	SXB 5 - 12T	515	17,5		
SXB 5 - 15S	SXB 5 - 15T	541	18,5		
SXB 5 - 20S	SXB 5 - 20T	620	20,5		

Single-phase version featuring a condenser with overload protection and automatic resetting system. Series 3-20S, 5 -20S and all three-phase versions do not feature overload protection.

The following features are available upon request:

- versions with a cable 20 or 40 m long;
- version with KTW, WRAS, ACS type-approved cable;
- versions with float switch.

- **Protection class: IP 68**
- **Insulation class: F**
- **Rated voltage tolerance: ± 10 %**
- **Max no. of starts per hour: 40**
- **Pumped liquid temperature: 0°C - 40°C**
- **Max amount of sand tolerated in water: 50 g/m³**
- **Max. immersion depth: 50 m**

hydroo®

Be pumping partners

HYDROO
Pump Industries SL

Carrer La Banyeta Nova, 11
Polígon Industrial La Banyeta
17843 Palol de Revardit
Catalonia. Spain
Tel. +34 972 394 654
E-mail: info@hydroo.com
www.hydroo.com

201801-CTL-SXB-EN
subject to amendments

