
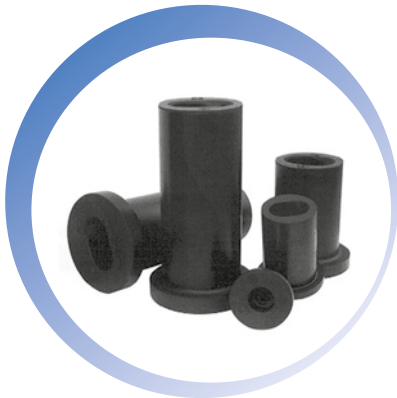


**FL--EF**

## Screw pump with floating stator

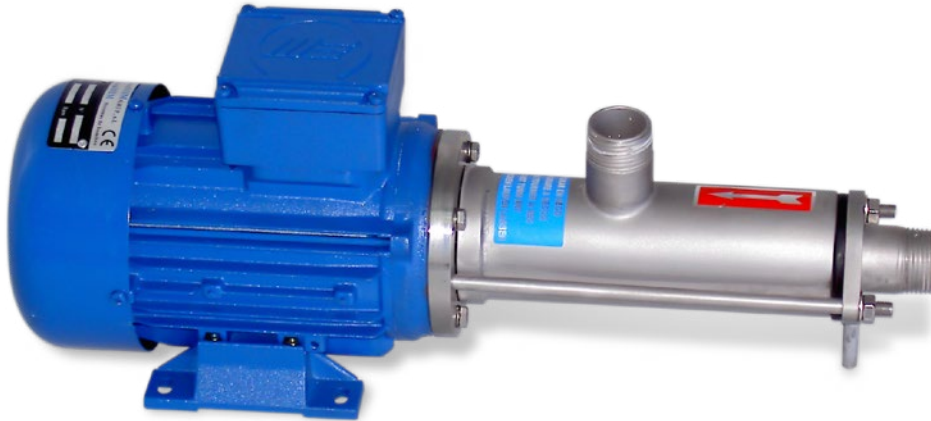

### APPLICATIONS

The FL--EF screw pumps are designed specifically for pumping fluids that require special care in handling like flocculants, among others.

### CHARACTERISTICS

BSP connections  
Level of finish: Industrial

### MATERIALS

Parts in contact with product in SS AISI 316  
Stator and gaskets in Nitrile  
Mechanical seal C/C/N


### OPTIONS

Other connections: DIN 11851, DIN 2576, SMS, IDF, CLAMP, etc.  
Mechanical adjustable speed disc drive  
Trolley, platform

MODEL	kW	Speed (Rpm)	Max. height (m.w.c.)	Flow (m <sup>3</sup> /h)
<b>FL15EF</b>	0.25	1.500	50	0.3
<b>FL30EF</b>	0.75	1.500	50	2.5
<b>FL40EF</b>	1.1	1.000	50	3.8
<b>FL40EFB</b>	2.2	615	50	8.0

DIMENSIONS AND CHARACTERISTICS OF FL--EF MODEL

SELECTION ZONE

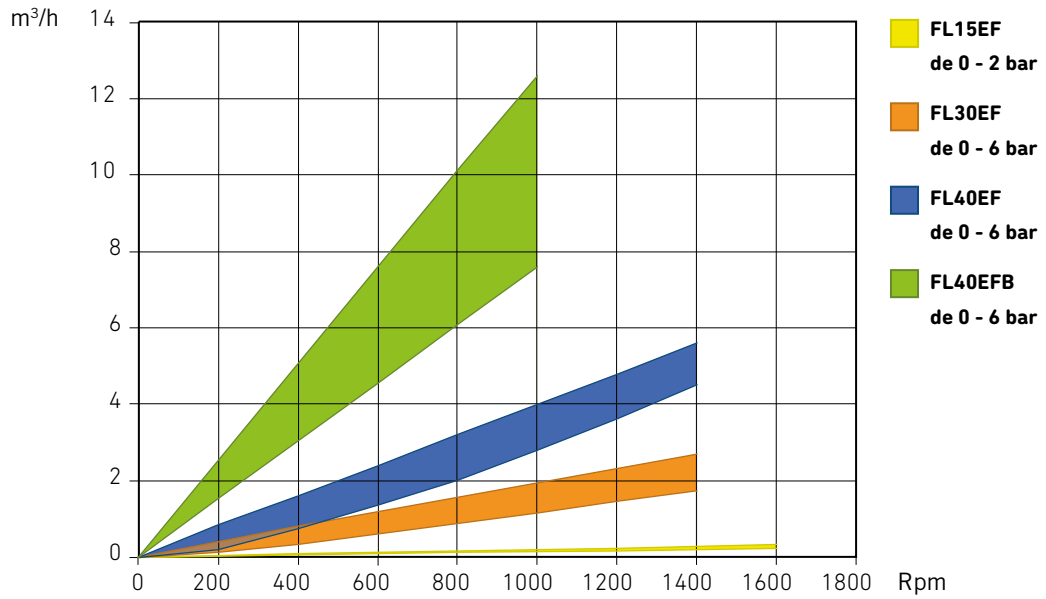

MODEL	A	B	D	E	H	H1	L	M	N	O	P	U
FL15EF	248	156	122	1" BSP	63	75	85	136	110	112	90	7
FL30EF	345	240	161	1 ¼" BSP	80	105	235	160	125	125	100	9.5
FL40EF	435	285	181	2" BSP	90	125	280	182	155	140	125	9.5
FL40EFB	500	370	181	2 ½" BSP	100	140	400	185	210	160	80	11

