

# ELECTROPERMANENT MAGNETIC CHUCKS LINI-POL FOR GRINDING

## CHARACTERISTICS


Standard pitch pol 20-4: 20 mm iron - 4 mm brass  
 Other available pitch poles: 15-4, 10-3 and 6-3 mm  
 Attraction force: 12 daN / cm<sup>2</sup>.  
 Uniform magnetic field.

Tightness guaranteed; submersible in liquid dielectric.  
 Includes two end stops and 4 m cable from the chuck to the electronic control.


Voltage single phase 380 V.

It is equipped with a remote control for the magnetization and demagnetization of the chuck. It allows power regulation. It incorporates a safety contact which prevents the machine being started if the chuck is not magnetized.

Protection: IP67

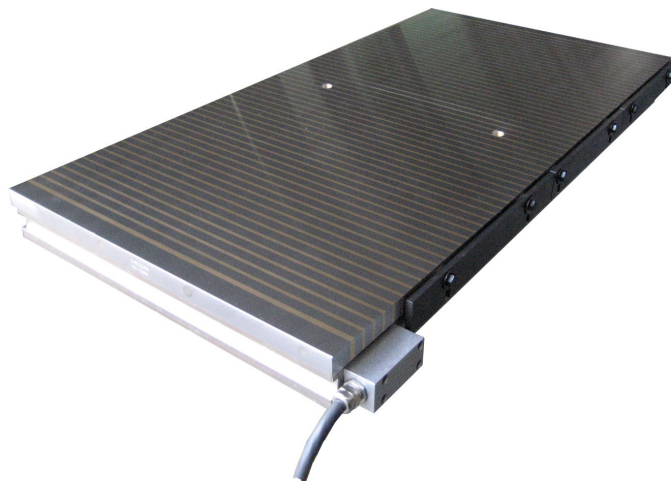

CODE	A mm	B mm	C mm	POLAR PITCH Iron-Brass	WEIGHT Kg.
30.21.010	400	200	85	20 - 4 mm	50
30.21.012	500	200	85	20 - 4 mm	65
30.21.014	600	200	85	20 - 4 mm	78
30.21.018	800	200	85	20 - 4 mm	95
30.21.212	500	300	85	20 - 4 mm	99
30.21.214	600	300	85	20 - 4 mm	119
30.21.218	800	300	85	20 - 4 mm	158
30.21.222	1000	300	85	20 - 4 mm	198
30.21.414	600	400	85	20 - 4 mm	158
30.21.418	800	400	85	20 - 4 mm	211
30.21.422	1000	400	85	20 - 4 mm	263
30.21.423	1200	400	85	20 - 4 mm	316
30.21.618	800	500	85	20 - 4 mm	262
30.21.622	1000	500	85	20 - 4 mm	329
30.21.623	1200	500	85	20 - 4 mm	395
30.21.818	800	600	85	20 - 4 mm	316
30.21.822	1000	600	85	20 - 4 mm	395
30.21.823	1200	600	85	20 - 4 mm	474

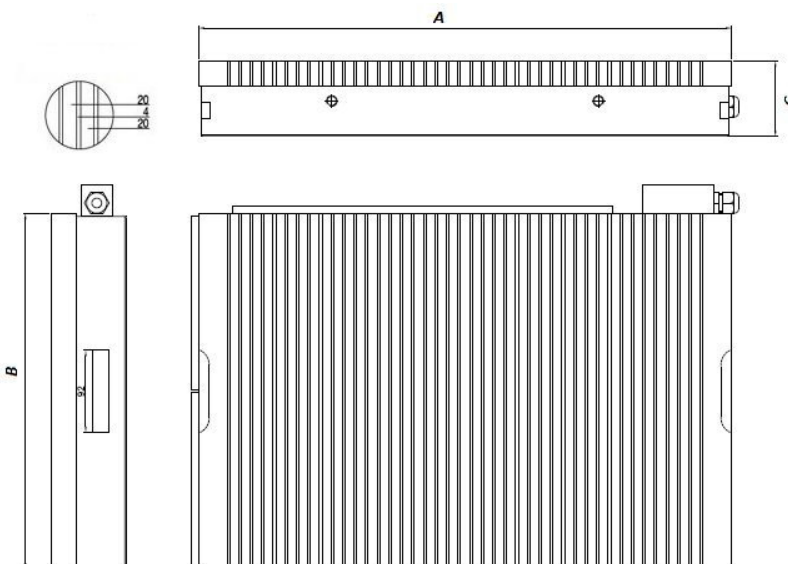

## ELECTRONIC CONTROL

Voltage single phase 380 V.

It is equipped with a remote control for the magnetization and demagnetization of the chuck.

It allows power regulation.

It incorporates a safety contact which prevents the machine being started if the chuck is not magnetized.

Protection: IP67

Code 71.53.051-021

Weight: 5 Kg

